

音频解码芯片规格书

——AC109N 芯片

珠海市杰理科技有限公司

版本：V1.0

日期：2012.12.04

ZHUHA

AC109N Features

High performance 8-bit MCU

- DC-48MHZ operation
- Compatible with 8051
- Extended 16-bit DSP instructions
- All instructions are single-cycle except branching instructions
- Two data pointer for indirect addressing

Program Memory

- 16K Bytes OTP program memory

Interrupt Feature

- 16 Vectored interrupts
- External wake up/interrupt on 4 GPIOs
- 4 Levels interrupt priority

Flexible I/O

- 32 GPIO pins
- All GPIO pins can be programmable as input or output individually
- All GPIO pins are internal pull-up/pull-down selectable individually
- CMOS/TTL level Schmitt triggered input

Digital Peripheral Feature

- Two multi-function 8-bit timers, support capture and PWM mode
- Two multi-function 16-bit timers, support Capture mode
- Watchdog
- MPEG-1, MPEG-2, MPEG-2.5 Audio Layer 1,2,3 decoder , Bit rate 8-448Kbps, CBR/VBR/ABR
- Support 9 sampling frequency:
8kHz/11.025kHz/12kHz/16kHz/22.05kHz/24kHz/32kHz/44.1kHz/48kHz
- One full-duplex UART
- One SPI with EMI mode, support DMA
- LCD controller, support 6-COM 16-SEG
- IIC HOST/DEVICE controller
- SD Card Host controller
- Full speed USB 2.0 HOST/DEVICE controller

Analog Peripheral Features

- One 1~24MHz Crystal Oscillator
- An independent powered RTC with One 32KHz Crystal Oscillator
- One internal RC oscillator
- One internal high- performance RC oscillator
- Full speed USB 2.0 PHY
- 48MHz PLL-based clock generator

Confidential

The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.

- 16-bit Stereo DAC , SNR > 90dB
- Embedded headphone amplifier
- 2 channels Analog MUX
- 1 channels Analog MIC
- 8 Channels 10-bit ADC
- 2 channels 4 levels Low Voltage Detector
- Power-on reset
- Two LDO: 5V to 1.8V, 5V to 3.3V

Power Supply

- VDDLDO is 3.2V to 5.5V
- VDDIO is 3.0V to 3.6V
- VDDCORE is 1.6V to 2.0V

Packages

- LQFP48
- SOP28

Temperature

- Operating temperature: -40 to +85
- Storage temperature: -65 to +150

引脚定义

1.1 引脚分配

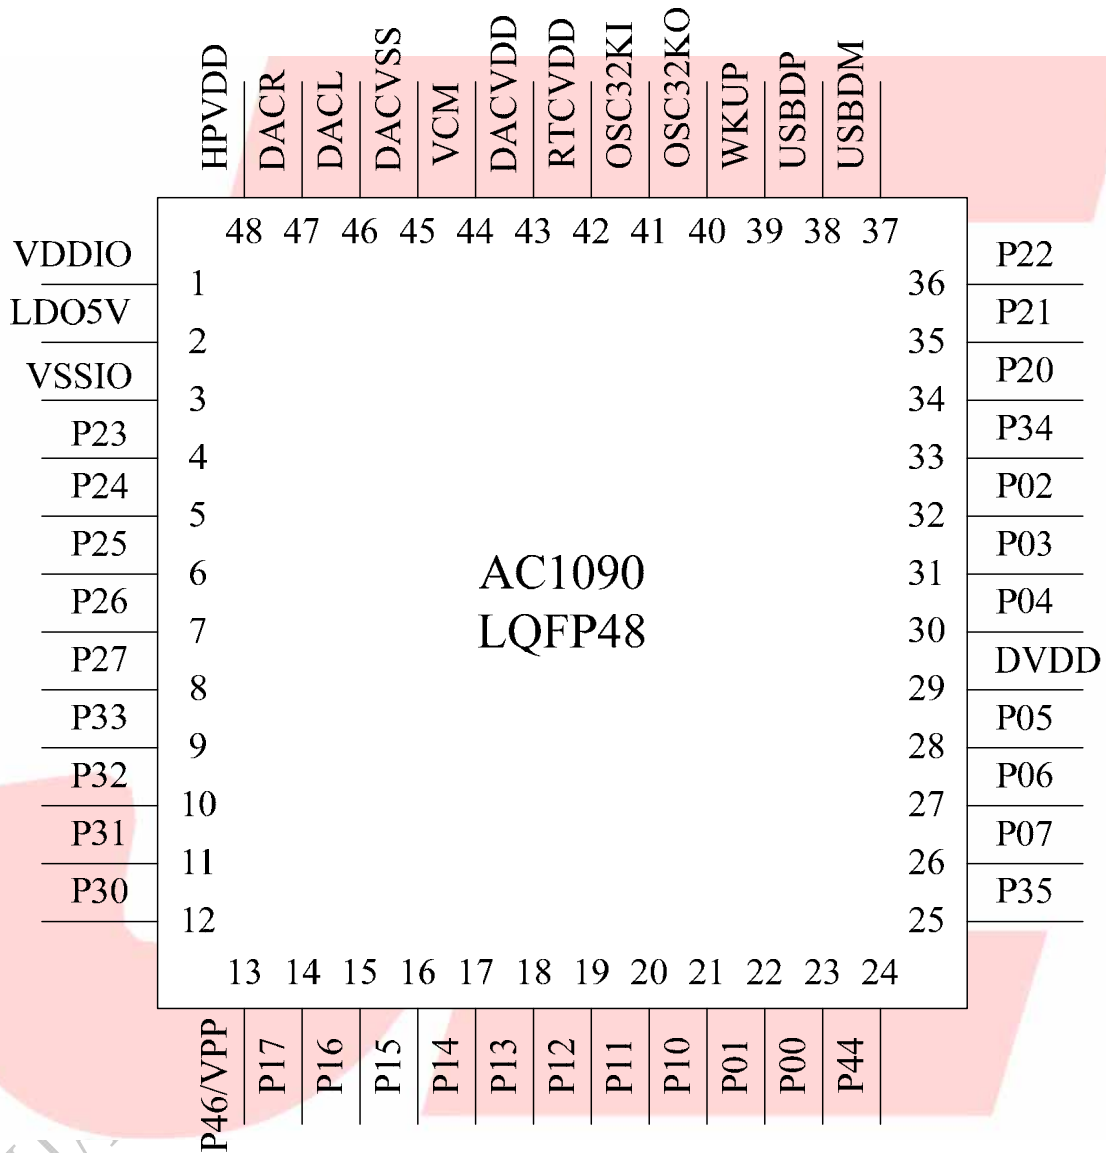


图 1 AC1090_48PIN 引脚分配图

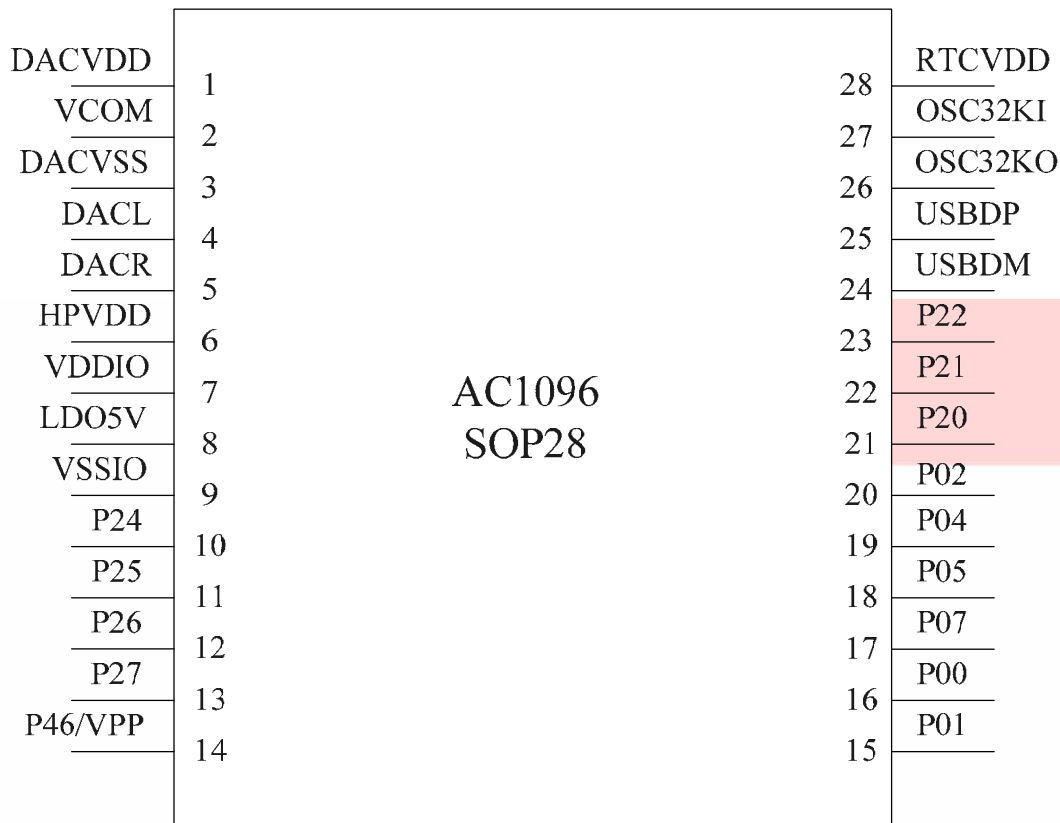


图 2 AC1096_28PIN 引脚分配图

1.2 引脚描述

表 1 AC109n 引脚描述

AC1090 (LQFP48)	AC1096 (SOP28)	Name	I/O Type	Drive (mA)	Function
1	7	VDDIO	P	/	IO Power 3.3V
2	8	LDO5V	P	/	LDO Power 5V
3	9	VSSIO	P	/	IO Ground
4		P23	I/O	8	GPIO
5	10	P24	I/O	8	GPIO
6	11	P25	I/O	8	GPIO
7	12	P26	I/O	8	GPIO
8	13	P27	I/O	8	GPIO
9		P33	I/O	24	GPIO
10		P32	I/O	24	GPIO
11		P31	I/O	24	GPIO
12		P30	I/O	24	GPIO

13	14	P46/VPP	I/O	8	GPIO OTP Program Power
14		P17	I/O	8	GPIO
15		P16	I/O	8	GPIO
16		P15	I/O	8	GPIO
17		P14	I/O	8	GPIO
18		P13	I/O	8	GPIO
19		P12	I/O	8	GPIO
20		P11	I/O	8	GPIO
21		P10	I/O	8	GPIO
22	15	P01	I/O	8	GPIO
23	16	P00	I/O	8	GPIO
24		VDDIO	P	/	IO Power 3.3V
25		VSSIO	P	/	IO Ground
26	17	P07	I/O	8	GPIO
27		P06	I/O	8	GPIO
28	18	P05	I/O	8	GPIO
29		DVDD	P	/	Core Power 1.8V
30	19	P04	I/O	8	GPIO
31		P03	I/O	8	GPIO
32	20	P02	I/O	8	GPIO
33		P34	I/O	24	GPIO
34	21	P20	I/O	8	GPIO
35	22	P21	I/O	8	GPIO
36	23	P22	I/O	8	GPIO
37	24	USBDM	I/O	/	USB Negative Data
38	25	USBDP	I/O	/	USB Positive Data
39		WKUP	O	/	RTC WakeUp Output
40	26	OSC32KO	O	/	RTC32K oscillator output
41	27	OSC32KI	I	/	RTC32K oscillator input
42	28	RTCVDD	P	/	RTC Power 1.8V
43	1	DACVDD	P	/	DAC Power 3.1V
44	2	VCOM	P	/	DAC Reference
45	3	DACVSS	P	/	DAC Ground
46	4	DACL	O	/	DAC Left Channel
47	5	DACR	O	/	DAC Right Channel
48	6	HPVDD	P	/	Headphone Power 3.3V

Confidential

The information contained herein is the exclusive property of JIELI and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of JIELI.